Royal Sovereign

Office Products

- Pouch Laminators
- Pouch Films
- Binding Machines & Supplies
- Paper Shredders
- Coin Sorters
- Bill Counters
- Counterfeit Detectors

Enhancing life at work and home

Professional Pouch Laminators

HSH-1201

Features

- 6-roller system provides consistent, even temperature to ensure professional quality lamination
- Easily adjust the 12 speed controls to fit your lamination needs
- High speeds ranging up to 2700mm/min / 8.8ft/min
- Ability to check the current temperature of the rollers
- Automatic cooling system rotates the rollers after lamination to prevent damage by cooling them evenly
- During stand-by the temperature automatically changes to 80ºC / 176ºF after 1 hour
- Detachable front cover provides easy access to clean the rollers
- Accepts hot film thickness up to 250mic (10mil)
- Cold lamination possible

Applications

Artwork, Photo albums, Pop up displays, Graphic material, Maps, Ad material

RHD-2201 / 2201P

Features

- 6-roller system provides consistent, even temperature to ensure professional quality lamination
- Durable metal housing
- Easily adjust the speed and temperature controls to fit your lamination needs
- High speeds ranging up to 2700mm/min / 8.8ft/min
- Ability to laminate mounting board up to 3mm / 120 mil
- Accepts hot film thickness up to 250mic / 10mil
- Cold lamination possible
- Model RHD-2201P is used only for transference film

Applications

Artwork, Photo albums, Pop up displays, Graphic material, Maps, Ad material, Specialized in transfer printing lamination(RHD-2201P)

Specifications

Description	HSH-1201	RHD-2201	RHD-2201P
Power Consumption	1200 Watts	1200 Watts	1200 Watts
Max.Laminating Width	330 mm / 13˝	346 mm / 13.6˝	346 mm / 13.6˝
Film Thickness	75~250 mic / 3~10 mil	75~250 mic / 3~10 mil	Transference film
Max Laminating Speed	2700 mm/min / 8.8 ft/min	2700 mm/min / 8.8 ft/min	310 mm/min / 1.0 ft/min
Ready time	5~6 min	5~6 min	8~10 min
Heating Method	Hot Roller	Hot Roller	Hot Roller
Adjustable Temp.	Yes (Touch Button)	Yes (Touch Button)	Yes (Touch Button)
Temp' Control Type	Digital (Micom)	Digital (Micom)	Digital (Micom)
Drive Motor	DC Geared	DC Geared	DC Geared
Adjustable Speed	Yes (Touch Button)	Yes (Touch Button)	Yes (Touch Button)
Transport Type	6 Roller	6 Roller	6 Roller
Display	LCD	FND, LED	FND , LED
Cold Lamination	Yes	Yes	Yes
Photo Lamination	Yes	Yes	Yes
Mounting Thickness	Yes (3 mm / 120 mil)	Yes (3 mm / 120 mil)	-
Reverse	Yes	Yes	Yes

Professional Pouch Laminators

NB-1900N

Features

- 4-roller system provides consistent, even temperature to ensure professional quality lamination
- Easy to use digital temperature controls
- Wide laminating capabilities up to 445mm / 17.5 in
- Fan cooling system used to cool down rollers after use
- Ability to laminate mounting board up to 2mm / 80 mil
- Accepts hot film thickness up to 250mic (10mil)
- Cold lamination possible

Applications

Blue print, Sign displays, Poster, Ad material, Maps

NPH-900N / 1200N

Features

- 4-roller system provides consistent, even temperature to ensure professional quality lamination
- 7 easy to use memory and speed settings
- Ability to check the current temperature of the rollers
- Automatic cooling system rotates the rollers after lamination to prevent damage by cooling them evenly
- Detachable front cover provides easy access to clean the rollers
- Ability to laminate mounting board up to 2mm / 80 mil
- Accepts hot film thickness up to 250mic (10mil)
- Cold lamination possible

Applications

Artwork, Photo albums, Pop up displays, Graphic material

Specifications

Description	NB-1900N	NPH-900N	NPH-1200N
Power Consumption	1000 W	850 Watts	1000 Watts
Max.Laminating Width	445 mm / 17.5″	240 mm / 9.4″	330 mm / 13″
Film Thickness	75~250 mic / 3~10 mil	75~250 mic / 3~10 mil	75~250 mic / 3~10 mil
Max Laminating Speed	520 mm/min / 1.7 ft/min	750 mm/min / 2.5 ft/min	750 mm/min / 2.5 ft/min
Ready time	4~5 min	6~7 min	6~7 min
Heating Method	Hot Roller	Hot Roller	Hot Roller
Adjustable Temp.	Yes (Touch Inlay Switch)	Yes (Touch Rubber)	Yes (Touch Rubber)
Temp' Control Type	Digital (Micom)	Digital (Micom)	Digital (Micom)
Drive Motor	AC Geared	DC Geared	DC Geared
Adjustable Speed	Fixed	Yes (Touch Rubber)	Yes (Touch Rubber)
Transport Type	4 Roller	4 Roller	4 Roller
Display	LED & INLAY	LCD	LCD
Cold Lamination	Yes	Yes	Yes
Photo Lamination	Yes	Yes	Yes
Mounting Thickness	Yes (2 mm / 80 mil)	Yes (2 mm / 80 mil)	Yes (2 mm / 80 mil)
Reverse	No	Yes	Yes

Office Products

Office Pouch Laminators

PL-910 / 1310

Features

- 4-roller system provides consistent, even temperature to ensure high quality lamination
- Easy to use controls
- Patented automatic reverse function sends jammed materials back out the front of the machine
- Cooling plate and fan used to cool down film as it exits the machine
- Automatically shuts-off after idling for 1 hour
- Automatic cooling system rotates the rollers after lamination to prevent damage by cooling them evenly
- Accepts hot film thickness up to 250mic (10mil)
- Cold lamination possible

Applications

Various type of photos, Inkjet material products, Digital printouts

APL-230 / 330U

Features

- 4-roller system provides consistent, even temperature to ensure high quality lamination
- Easy to use controls
- Patented automatic reverse function sends jammed materials back out the front of the machine
- Cooling plate and fan used to cool down film as it exits the machine
- Automatic cooling system rotates the rollers after lamination to prevent damage by cooling them evenly
- Automatically shuts-off after idling for 1 hour
- Accepts hot film thickness up to 250mic(10mil) (APL-230) and 175mic(7mil) (APL-330U)
- Cold lamination possible

Applications

Various type of photos, Inkjet material products, Digital printouts

NR-901 / 1201

Features

- 4-roller system provides consistent, even temperature to ensure high quality lamination
- Quick ready time of 2~3 minutes
- Easy to use soft touch controls
- Adjustable temperature controls
- Photo lamination possible with Royal Sovereign FOTO™ film
- Accepts hot film thickness up to 250mic (10mil)
- Cold lamination possible

Applications

Blue print, Sign displays, Poster, Ad material, Maps

Specifications

Description	PL-910	PL-1310	APL-230	APL-330U	NR-901	NR-1201
Power Consumption	450 Watts	730 Watts	550 Watts	820 Watts	290 Watts	500 Watts
Max.Laminating Width	235mm/9.3″	340 mm / 13.3″	235 mm / 9.3″	340 mm / 13.4″	230 mm / 9.1″	320 mm / 12.6″
Film Thickness	75~250 mic / 3~10 mil	75~250 mic / 3~10 mil	75~250 mic / 3~10 mil	75~175 mic / 3~7 mil	75~250 mm / 3~10 mil	75~250 mm / 3~10 mil
Max Laminating Speed	520 mm/min / 1.7 ft/min	520 mm/min / 1.7 ft/min	520 mm/min / 1.7 ft/min	520 mm/min / 1.7 ft/min	410 mm/min / 1.3 ft/min	410 mm/min / 1.4 ft/min
Ready time	4 min	4 min	4 min	3~4 min	2~3 min	2~3 min
Heating Method	Hot Shoe	Hot Shoe	Hot Shoe	Hot Shoe	Heat Plate	Heat Plate
Adjustable Temp.	Yes (Button)	Yes (Button)	Yes (Rotary Volume)	Yes (Button)	Yes (Touch Inlay Switch)	Yes (Touch Inlay Switch)
Temp' Control Type	Digital (Micom)	Digital (Micom)	Digital (Micom)	Digital (Micom)	Digital (Micom)	Digital (Micom)
Drive Motor	AC Synchro-Rev.	AC Synchro-Rev.	AC Synchro-Rev.	AC Synchro-Rev.	AC Synchronous	AC Synchronous
Adjustable Speed	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
Transport Type	4 Roller	4 Roller	4 Roller	4 Roller	4 Roller	4 Roller
Display	FND/LED	FND/LED	LED	LED	LED,Inlay	LED,Inlay
Cold Lamination	Yes	Yes	Yes	Yes	Yes	Yes
Photo Lamination	Yes	Yes	Yes	Yes	No	No
Mounting Thickness	No	No	No	No	No	No
Reverse	Manual & Auto reverse	Manual & Auto reverse	Manual & Auto reverse	Manual & Auto reverse	No	No

Personal Pouch Laminators

ES-410 / 915 / 1315

Features

- High quality 2-roller laminator
- Quick ready time of about 5 minutes
- Easy to use buttons control temperature precisely
- Patented manual reverse functions frees jammed items
- Patented cooling guide bars allow hot laminated items to lay flat and cool
  (ES-410)
- Accepts hot film thickness up to 125mic (5mil)
- Cold lamination possible

Applications

Various type of photos, Inkjet material products, Digital printouts

RPA-400R / 5954R / 5254R

Features

- Quality 2-roller laminator
- Easy to use preset temperature controls
- Quick ready time of only 3 minutes
- Photo lamination possible with Royal Sovereign FOTO™ film
- Accepts hot film thickness up to 175mic (7 mil)

Applications

ID/ Name cards, Menus, Personal documents, Certificates, Membership cards, 4″ x 6″ Photos

Specifications

Description	ES-410	ES-915	ES-1315	RPA-400R	RPA-5954R	RPA-5254R
Power Consumption	110 Watts	300 Watts	400 Watts	120 Watts	400 Watts	500 Watts
Max.Laminating Width	112 mm / 4.4″	230 mm / 9″	320 mm / 12.6″	112mm / 4.4″	236 mm / 9.3″	320 mm / 12.6″
Film Thickness	75~125 mic / 3~5 mil	75~175 mic / 3~7 mil	75~175 mic / 3~7 mil	75~125 mic / 3~5 mil	75~175 mic / 3~7 mil	75~175 mic / 3~7 mil
Max Laminating Speed	170 mm/min / 0.56 ft/min	360 mm/min / 1.18 ft/min	360 mm/min / 1.18 ft/min	140 mm/min / 0.5 ft/min	426 mm/min / 1.4 ft/min	426 mm/min / 1.4 ft/min
Ready time	6~8 minutes	3~5 minutes	3~5 minutes	3 min	3 min	3 min
Heating Method	Hot Shoe	Hot Shoe	Hot Shoe	Heat Plate	Heat Plate	Heat Plate
Adjustable Temp.	Fixed	Button Type	Button Type	Fixed	Fixed	Fixed
Temp' Control Type	Analog (Bimetal)	Digital (Micom)	Digital (Micom)	Analog (Bimetal)	Analog (Bimetal)	Analog (Bimetal)
Drive Motor	AC Synchronous	AC Synchronous	AC Synchronous	AC Synchronous	AC Synchronous	AC Synchronous
Adjustable Speed	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
Transport Type	2 Roller	2 Roller	2 Roller	2 Roller	2 Roller	2 Roller
Display	LED	LED	LED	Yes	Yes	Yes
Cold Lamination	Yes	Yes	Yes	No	No	No
Photo Lamination	Yes	Yes	Yes	No	No	No
Mounting Thickness	No	No	No	No	No	No
Reverse	No	Yes (Manual)	Yes (Manual)	No	No	No

Personal Pouch Laminators

ES-400C

Features

- High quality 2-roller laminator
- Quick ready time of about 5 minutes
- Easy to use preset temperature controls
- Patented cooling guide bars allow hot laminated items to lay flat and cool
- Accepts hot film thickness up to 175mic (7mil)
- Cold lamination possible

Applications

Photos, Inkjet printouts, ID cards, Personal documents, Membership cards

ES-902 / 1302

Features

- High quality 2-roller laminator
- Quick ready time of about 5 minutes
- Rotary temperature switch controls temperature precisely
- Patented cooling guide bars allow hot laminated items to lay flat and cool
- Patented manual reverse functions frees jammed items
- Accepts hot film thickness up to 175mic (7mil)
- Cold lamination possible

Applications

Photos, Inkjet printouts, Personal documents, Educational materials

Specifications

Description	ES-400C	ES-902	ES-1302
Power Consumption	100 Watts	300 Watts	400 Watts
Max.Laminating Width	112 mm / 4.4″	235 mm / 9.2″	336 mm / 13.2″
Film Thickness	75~125 mic / 3~5 mil	75~175 mic / 3~7 mil	75~175 mic / 3~7 mil
Max Laminating Speed	165 mm/min / 0.5 ft/min	300 mm/min / 0.98 ft/min	300 mm/min / 0.98 ft/min
Ready time	10 minutes	4~5 minutes	5~7 minutes
Heating Method	Hot Shoe	Hot Shoe	Hot Shoe
Adjustable Temp.	Fixed	Rotary volume	Rotary volume
Temp' Control Type	Analog (Bimetal)	Analog (Thermistor)	Analog (Thermistor)
Drive Motor	AC Synchronous	AC Synchronous	AC Synchronous
Adjustable Speed	Fixed	Fixed	Fixed
Transport Type	2 Roller	2 Roller	2 Roller
Display	LED	LED	LED
Cold Lamination	Yes	Yes	Yes
Photo Lamination	Yes	Yes	Yes
Mounting Thickness	No	No	No
Reverse	No	Yes / Manual Reverse	Yes / Manual Reverse

Personal Pouch Laminators

EL-9DF

Features

- 2-roller foam board laminator
- Accepts foam board up to 3mm (120mil)
- Patented cooling guide bars allow hot laminated items to lay flat and cool
- Ideal for mounting photos and POP displays
- Accepts hot film thickness up to 175mic (7mil)
- Cold lamination possible

Applications

Foam board, Picture frames, POP displays

CS-923 / 1223

Features

- High quality 2-roller laminator
- Quick ready time of about 3~5 minutes
- Rotary temperature switch controls temperature precisely
- Accepts hot film thickness up to 125mic (5mil)
- Cold lamination possible
- Manual reverse functions frees jammed items
- Slim design & Glossy top

Applications

Important Documents, Photographs,
School Materials, ID's, Inkjet printouts

Specifications

Description	EL-9DF	CS-923	CS-1223
Power Consumption	500 Watts	265 W/2.2A	400 W/3.3A
Max.Laminating Width	240 mm / 9.4˝	230mm	330mm
Film Thickness	75~175 mic / 3~7 mil	80~125 mic	80~125 mic
Max Laminating Speed	410 mm/min / 1.4 ft/min	0.85 ft/min	0.85 ft/min
Ready time	3~4 min	3~5 minutes	3~5 minutes
Heating Method	Hot Shoe	Heating roller	Heating roller
Adjustable Temp.	Select Button	Fixed	Fixed
Temp' Control Type	Digital (Micom)	Thermostatically controlled	Thermostatically controlled
Drive Motor	AC Synchronous	AC Synchronous	AC Synchronous
Adjustable Speed	Fixed	Fixed	Fixed
Transport Type	2 Roller	2 Roller	2 Roller
Display	LED	LED	LED
Cold Lamination	Yes	Yes	Yes
Photo Lamination	Yes	Yes	Yes
Mounting Thickness	3mm / 120mil	No	No
Reverse	No	Yes / manual	Yes / manual

Heat-Sealed Laminating Film

Royalam™ Gloss

Features

- Gloss film is crystal clear with high transparency and excellent adhesion
- Provides a bright shiny finish while enhancing colors and image sharpness
- Great for presentation materials, ID cards, all paper documents, posters, photos, menus, photographic materials, and Point-of-Purchase displays
- Available in 25~300mic (1~12mil)
- Application Temp : For 75mic (3mil) / 95~100°C (203~212°F)

Applications

- Presentation materials, ID Card, All paper documents, Poster, Photo, Menu, Photographic materials, Point-Of-Purchase displays

Royalam™ Matt/Luster Film

Features

- Matte film provides a softer looking clear matte finish by reflecting light and reducing glare
- After laminating, the matte film texture allows writing from pens, pencils and markers
- Great for all documents, ID cards, posters, digital inkjet photos, menus, maps, telephone directories, educational materials and areas with strong lighting
- Available in Matte-Matte and Matte-Clear
- Available in 75mic (3mi) • Application Temp : For 75mic (3mil) /100~105°C (212~221°F)

Applications

- Matte-Matte: Dim effect under strong light, Digital inkjet and photographic output
- Matt-Gloss : Document, ID Card, Map laminating, Anything where one side matte effects is required

Foto-Shield™

Features

- Foto-Shield film pouches have a specially designed embossed layer of glue to enhance adhesion and help prevent air bubbles when laminating photos
- Provides a crystal clear bubble-free finish while enhancing colors and image sharpness
- Bottom of film is available in Black or White to frame the photo or document and enhance its appearance
- Great for photo lamination, educational materials, commercial artwork, and digital printing on glossy paper • Available in 125mic (5mil) / Black or White Opaque Type
- Application Temp : 105~120°C (212~248°F)

Applications

- Suitable laminating film for photos(Design portfolio), Digital prints out, Commercial artwork, School project

Foto-Flex™ Film

Features

- Foto-Flex pouches use a flexible vinyl base film and have a specially designed embossed layer of glue to enhance adhesion and help prevent air bubbles when laminating photos
- Embossed, Sand Texture, and Crystal-Matte finishes provide a softer looking clear matte finish by reflecting light and reducing glare
- Great for photo lamination, menus, place mats, mouse pads, educational materials, digital printing on glossy paper, and flexible displays.
- Available in 175mic (7mil) Sand/Matte & Texture
- Application Temp : 105~115°C (219~239°F)

Applications

- Photo lamination, Menu, place mats & mouse pads, Digital inkjet output, Flexible displays

LOMEL™

Features

- Lomel pouches provide high transparency and excellent adhesion at low temperatures
- Low temperature lamination is required for certain types of ink printings
- Available in Gloss and Matte
- Great for photo lamination, inkjet media, printed documents, posters, and commercial artwork.
- Available in 75mic (3 mil) / Gloss
- Application Temp : 80~90°C (176~194°F)

Applications

- Inkjet media, Digital print, Photo, Poster, Printed document, Commercial artwork

UV Protection Gloss Film

Features

- UV Protection film provides up to 90% UV protection compared to normal pouch films that provide only 30% protection from UV damage
- Protects documents and photos and prevents fading of colors for much longer than regular film, even in severe weather conditions
- Great for outdoor displays, posters, commercial artwork, and areas with high sunlight
- Available in 75, 100, 125mic (3~5mil) / Gloss
- Application Temp : For 100mic (4mil) / 105~110°C (212~228°F)

Applications

- Outdoor display, Poster & Commercial artwork, Wide format photo printed image

Specifications

Thickness mic	Item / mil	RoyalamTM II Gloss	RoyalamTM II Matt	RoyalamTM II Luster	RoyalamTM II UV	LOMEL	Foto-Shield	Foto-Flex
25	1	0	0	0				
32	1.28	0	0	0				
42	1.68	0	0	0		0		
60	2.4	0	0	0				
75	3	0	0	0	0	0		
80	3.2	0	0	0				
100	4	0	0	0	0	0		
125	5	0	0	0	0	0	0	
150	6	0	0	0				
175	7							0
180	7.2	0	0	0				
200	8	0	0	0				
225	9							0
250	10	0	0	0				

Pouch Sizes (in/mm)				
Credit : 2-1/8 x 3-3/8 (54 x 86)	Large ID : 2-3/4 x 3-15/16 (70 x 100)	B5 : 7-13/32 x 10-11/32 (188 x 263)	B4 : 10-11/32 x 14-9/16 (263 x 370)
Business : 2-1/4 x 3-3/4 (57 x 95)	Luggage : 2-1/4x 4-1/4 (64 x 108)	A4 : 8-1/2 x 11-15/16 (216 x 303)	A3 : 11-15/16 x 16-3/4 (303 x 426)
Small ID : 2-3/8 x 3 17/32 (60 x 90)	B6 : 5-9/32 x 7-13/32 (134 x 188)	Letter : 8-3/4 x 11-1/4 (222 x 286)	Menu : 12 x 18 (305 x 457)
ID : 2-9/16 x 3-3/4 (65 x 95)	A5 : 6-1/16 x 8-1/2 (54 x 216)	Legal : 9 x 14-1/2 (229 x 368)	A2 : 16-3/4 x 23-5/8 (426 x 600)

Cold-Sealed Laminating Film (Pressure Sensitive)

Double DOCU-pro

Features

- Cold-Sealed (Pressure Sensitive) Pouch Film
- Easy to laminate by hand, no laminator needed
- Fast and easy to use, simply position your item onto the top layer of film, remove the release liner from the bottom adhesive film and laminate by hand
- Great for all documents, ID badges, ID cards, luggage tags, school projects, and anytime quick lamination is required
- Available in 300mic / 12mil PVC/ADH/PET
- Application Temp : 40°C (104°F)

Application

- When quick laminations required
- School project, Book cover
- Name card, Luggage tag
- Valuable document, certificates

Specifications

- Thickness
  300mic / 12mil (PVC/ADH/PET)

- Pouch

ID	71 x 116(mm) / 2.8 x 4.6(in)
Luggage tag	78 x 109(mm) / 3.1 x 4.3(in)
A4	222 x 313(mm) / 8.7 x 12.3(in)
Letter	232 x 296(mm) / 9.1 x 11.7(in)

DOCU-pro – Protection Sheet

Features

- Single Sided Cold-Sealed (Pressure Sensitive) Pouch Film
- Easy to laminate by hand, no laminator needed
- Fast and easy to use. Simply remove the release liner, position your item on the adhesive film, laminate by hand and then trim off edges if necessary
- Great for all documents, ID cards, book covers, certificates, school projects, and anytime quick lamination is required
- Available in 75mic (3mil) OPP Gloss & Matt / Adhesive
- Application Temp : 40°C (104°F)

Application

- When quick lamination required(Document)
- Name card, book cover, Document, certificate, POP/POS display

Specifications

- Thickness
  75mic / 3mil (OPP Gloss & Matt / Adhesive)

- Pouch

Letter	229 x 305(mm) / 9 x 12(in)
A2	435 x 620(mm) / 17.1 x 24.4(in)
A3	313 x 436(mm) / 12.3 x 17.2(in)
A4	226 x 313(mm) / 8.9 x 12.3(in)
B4	275 x 390(mm) / 10.8 x 15.4(in)

Transparent Film

Overhead Projector Film and Presentation Covers

Features

- Transparent film can be written on with pen, pencil, or marker and printed on using copy machines, inkjet printers, and laser printers
- Great for business and school presentations and training programs using overhead projectors. Use as presentation covers to customize your presentations
- PPC: Antistatic treatment (Plain Paper Copier)
- Inkjet: Acrylic coating finish is ideal for sharp looking inkjet printing
- Laser: Ideal for laser printing (W/B & Color)
- Hand writing: Clear sharp image when written on with permanent marker
- CCF: Antistatic treatment allows for continuous use in copy machines (Color Copier Film)

Application

- Hand writing, Classroom lesson
- Plain paper copier, Color copier
- Stockholder presentation, Training program
- Inkjet, B&W Laser Printers

Specifications

Type	Size (mm)	Thickness (mic)	Coating
PPC	210 x 297	103	Antistatic
	220 x 355		
Multi-Purpose	210 x 297	120	Copolymer
Inkjet	210 x 297	120	Acrylic
Laser		102	Surface
Hand writing		100	-
		125	
CCF		102	Antistatic

Type Note

- PPC: Antistatic treatment (Plain Paper Copier)
- Inkjet: Acrylic coating finish is ideal for sharp looking inkjet printing
- Laser: Ideal for laser printing (W/B & Color)
- Hand writing: Clear sharp image when written on with permanent marker
- CCF: Antistatic treatment allows for continuous use in a copy machine (Color Copier Film)

Special Film

Adhesive Backed Film (Sticky Back)

Features

- Provides a bright shiny finish while enhancing colors and image sharpness
- After lamination, easily peel off the release liner from the back of the pouch and stick it to your desired surface
- Easy to remove without leaving messy glue residue behind
- Great for signs, posters, announcements, and Point-of-Purchase displays
- Available in 38, 75, 100mic(1.5~4mil) PET Pouch / Adhesive
- Application Temp : For 100mic (4mil) / 110~125°C (230~257°F)

Application

- On the surface: Place announcement, Instruction
- Sign, Poster

Specifications

- Thickness(mic/mil)
  60 / 2.4, 75 / 3, 80 / 3.2, 100 / 4, 125 / 5, 150 / 6, 175 / 7, 200 / 8, 250 / 10
- Pouch(in / mm)

Credit : 2-1/8 x 3-3/8 (54 x 86)	Business : 2-1/4 x 3-3/4 (57 x 95)
Small ID : 2-3/8 x 3 17/32 (60 x 90)	ID : 2-9/16 x 3-3/4 (65 x 95)
Large ID : 2-3/4 x 3-15/16 (70 x 100)	Luggage : 2-1/4x 4-1/4 (64 x 108)
B6 : 5-9/32 x 7-13/32 (134 x 188)	A5 : 6-1/16 x 8-1/2 (54 x 216)
B5 : 7-13/32 x 10-11/32 (188 x 263)	A4 : 8-1/2 x 11-15/16 (216 x 303)
Letter : 8-3/4 x 11-1/4 (222 x 286)	Legal : 9 x 14-1/2 (229 x 368)
B4 : 10-11/32 x 14-9/16 (263 x 370)	A3 : 11-15/16 x 16-3/4 (303 x 426)
Menu : 12 x 18 (305 x 457)	A2 : 16-3/4 x 23-5/8 (426 x 600)

White Opaque

Features

- White Opaque film has a front side of clear gloss film and a back side of White film with a layer of aluminum embedded on the surface that blocks light and enhances the document or image
- Great for posters, photos, pictures, Point-of-Purchase displays, and outdoor displays
- Available in 115, 220mic (4.6, 8.8mil) / White Opaque (Hot melt film)
- Application Temp : For 115mic(4.6mil) / 105~120°C(221~248°F)

Application

- Poster, Photo / Picture, Pop-Up display, Outdoor display

Specifications

- Thickness(mic/mil)
  115 / 4.6, 220 / 8.8, 320 / 12.8
- Pouch(in / mm)

Credit : 2-1/8 x 3-3/8 (54 x 86)	Business : 2-1/4 x 3-3/4 (57 x 95)
Small ID : 2-3/8 x 3 17/32 (60 x 90)	ID : 2-9/16 x 3-3/4 (65 x 95)
Large ID : 2-3/4 x 3-15/16 (70 x 100)	Luggage : 2-1/4x 4-1/4 (64 x 108)
B6 : 5-9/32 x 7-13/32 (134 x 188)	A5 : 6-1/16 x 8-1/2 (54 x 216)
B5 : 7-13/32 x 10-11/32 (188 x 263)	A4 : 8-1/2 x 11-15/16 (216 x 303)
Letter : 8-3/4 x 11-1/4 (222 x 286)	Legal : 9 x 14-1/2 (229 x 368)
B4 : 10-11/32 x 14-9/16 (263 x 370)	A3 : 11-15/16 x 16-3/4 (303 x 426)
Menu : 12 x 18 (305 x 457)	A2 : 16-3/4 x 23-5/8 (426 x 600)

Foam Board Film

Features

- Foam Board Film combines clear gloss film with a layer of hard foam board that allows you to mount documents or photos firmly onto a thick sturdy surface
- Easel Backs included to create stand-up displays
- Great for posters, photos, sign boards, picture frames, presentations, interior decorations, and Point-of-Purchase displays
- Available in 100mic (4mil) Gloss Film / Foamboard / Gloss Film
- Application Temp : 100~105°C(212~220°F)

Application

- Interior decoration, Sign board
- Poster
- Pop up sign, Display board
- Picture frame, Presentation

Specifications

- Pouch(in / mm)

A4 : 8-4/5 x 12-1/5 (223 x 310)	Letter : 9 x 11-1/2 (229 x 293)
Picture : 4-3/8 x 6-1/2 (111 x 165)	

Thinflex™ Film

Features

- Thinflex is a single-sided, ultra thin laminating sheet designed for one sided protection of documents and photos
- Only 1 mil thickness provides UV protection, water resistance, scratch resistance, and curl resistance and it is easy to fold
- Great for passports, SS cards, confidential documents, roll-up banners, posters, book covers, certificates, and single sided laminating
- Available in 24mic (0.9mil)
- Application Temp : 95~105°C (203~221°F)

Applications

- Perfect for Single-Sided Laminating

• Indoor and Outdoor	• Documents Applications
• Poster	• Photo and Inkjet
• Roll-up Banners	• Digital Prints
• Flexible Displays	• Label / sticker
• Bookcover	

Removable Pouch Film

Features

- Items laminated with Removable Pouch Film can be easily removed by cutting the edges of the film and pulling out the original document
- Improved bonding provides longer protection for valuable documents that need to be preserved without damaging them
- Great for valuable documents, certificates, posters, trading cards, and photos
- Available in 100mic (4mil) Gloss
- Application Temp : 115~120°C (115~120°F)

Standard Application

- Certificate, Poster, Photo, Picture, Documents Applications

Specifications

- Pouch(in / mm)

ID : 2-9/16 x 3-3/4 (65 x 95)	A4 : 8-1/2 x 12 (216 x 303)
letter : 9 x 11-1/2 (229 x 292)	A3 : 12 x 16-4/5 (303 x 426)
photo : 4-1/4 x 6-1/4 (108 x 159)	

Resealable Pouch Film

Features

- Items laminated with Resealable Pouch Film can be easily repositioned within 24 hours before the seal becomes permanent
- Cold-Sealed (Pressure Sensitive) Laminating Film
- Easy to laminate by hand, no laminator needed and if you made a mistake during the lamination of your item you can unpeel the laminating film, reposition the item and re-laminate
- Great for all documents, certificates, and photos
- Available in 260mic (10.4mil) PVC / PET
- Application Temp : 40°C (104°F)

Applications

- Certificate, Poster, Photo, Picture, Documents Applications

Specifications

- Pouch(in / mm)

Letter : 9 x 11-1/2 (232 x 293)	A4 : 8-7/10 x 12 (220 x 304)
Business Card : 2-3/10 x 3-15/16 (58 x 100)	

Royal Sovereign Dry Erase

Features

- High gloss smooth surface allows easy writing and erasing
- Striped sheet eliminates air bubbles for & even adhesion to surfaces
- Adhesive back is easy to peel and won't leave any glue residue behind
- Tack up or use the adhesive backing to temporarily stick to most smooth surfaces
- Great for Office, School, or Home use

Sizes available

- Sheets: 5.5″ × 11″, 8.5″ × 11″, 12″ × 17″, 17″ × 22″ and equivalent metric sizes
- Rolls: 18″ × 6 ft, 24″ × 20 ft, 24″ × 10 ft, 24″ × 20 ft and equivalent metric sizes

Preprinted Dry Erase sheets available in addition to plain white

- Handwriting lines: Help kids practice their writing skills
- Monthly calendars: To keep track of your schedule
- Grids: Allow you to make accurate drawings

Applications

- In Conference Rooms
- Off-Site Meetings
- In Office uses
- Schools and Classrooms

Handwriting lines


Monthly calendars


Grids

Auto Feed Paper Shredders

AFS-801

Auto Remove Function Display

Normal

Auto Remove Jams

Auto Reverse

Features

- Internal JAM Removal function
- Patented Auto Feed Technology
  Shredder automatically feeds stacks of paper up to 100 sheets
- Multiple Feed
  Separate entries for auto, manual, and CD feed
- Auto Reverse
  Automatically reverses to free jams, then runs forward to continue shredding
- Auto start/stop
  Automatically begins to shred when paper is inserted
- Cross Cut
  Provides level 3 security for confidential documents
- Basket full indicator
  Indicator turns on when basket is full
- Quiet operation
  Sound level is comparable to normal conversation (60dB)
- Shreds paper, paper clips, staples, credit cards, CD/DVD

Specifications

Description	AFS-801
Power (Volt/Hz)	120V / 60 Hz , 230V / 50Hz
Power Consumption	260 W
Entry Width (mm)	230mm
Shred Type	Cross Cut
Shred Size (mm)	3 x 25 mm
Sheet Capacity (Sheets/Pass)	1~3 (Auto) / 8 (Manual)
Shred CD, CC	Yes
Speed (m/min)	3.2 m/min (60Hz) / 2.6 m/min (50Hz)
Input Method	Auto, Manual, CD (3 Way Input)
Auto Start/Stop	Yes
Manual Reverse Function	Yes
Control Process	Digital Micom Processor
Overload Protection	Yes
Basket Volume(l)	40 L
Noise (dB)	Under 60dB
Auto Feeding Stacker	100 Sheets
Unit Dimension(mm)	400 x 394 x 759
Unit Weight (Kg)	20.6

Auto Feed Paper Shredders

AFX-908N

Features

- Hands-Free Operation of up to 75 sheets at a time
- Micro-cut shredding allows for level 4 security protection
- Quiet operation of approximately 55dB is comparable to having a normal conversation
- 20 liter basket with window makes it easy to see when to dispose of shreds
- Caster wheels allow for easy movement
- Auto Start/Stop Controls
- Indicator will blink and the cutters will automatically stop if the door is opened or the safety cover is open
- Overheat and Overload Protection
- Internal JAM Removal Function

RHS-75M5

Features

- Multiple Feed Capabilities
- Auto Feed Features
  The shredder will automatically begin to shred stacks of paper when inserted into the Auto Feed Entry.
- Auto Reverse
  If a jam occurs, the machine automatically reverses to undo the jam.
- Internal JAM Removal Function
  When curled/crumpled paper is inserted it may result in a JAM problem.
- Auto Controls
- Overheat Protection
- Pull Out Basket

Specifications

Description	AFX-908N	RHS-75M5
Power (Volt/Hz)	120V / 60 Hz , 230V / 50Hz	120V / 60 Hz , 230V / 50Hz
Power Consumption	250 W	250 W
Entry Width (mm)	220mm	220mm
Shred Type	Micro Cut	Micro Cut
Shred Size (mm)	2 x 14 mm	3 x 9 mm
Sheet Capacity (Sheets/Pass)	2~3 (Auto) / 7 (Manual)	2~3 (Auto) / 7 (Manual)
Shred CD, CC	No	No
Speed (m/min)	2.8 m/min(60Hz), 2.4 m/min (50Hz)	1.6 m/min (7 Sheets) / 3.0 m/min (1 Sheet)
Input Method	Auto & Manual (2 Way Input)	Auto & Manual (2 Way Input)
Auto Start/Stop	Yes	Yes
Manual Reverse Function	Yes	Yes
Control Process	Digital Micom Processor	Digital Micom Processor
Overload Protection	Yes	Yes
Basket Volume(l)	20 L	20 L
Noise (dB)	Under 55dB	Under 58dB
Auto Feeding Stacker	75 Sheets	75 Sheets
Unit Dimension(mm)	345 x 293 x 615	345 x 293 x 615
Unit Weight (Kg)	10.1	8.7

Paper Shredders

RDS-808M6A

Features

- High Security Micro Cut Shredder (Security Level 4)
- Shreds up to 8 sheets at a time
- Ultra-Quiet Operation
- 20 liter basket with window makes it easy to see when to dispose of shreds
- Caster wheels allow for easy movement

RDS-808M6B

Features

- High Security Micro Cut Shredder (Security Level 4)
- Shreds up to 8 sheets at a time
- Ultra-Quiet Operation
- 20 liter basket with window makes it easy to see when to dispose of shreds
- Caster wheels allow for easy movement

Specifications

Description	RDS-808M6A	RDS-808M6B
Power Consumption	230 W	230 W
Entry Width	220mm	220mm
Shred Type	Micro Cut	Micro Cut
Shred Size	3 x 9 mm	3 x 9 mm
Sheet Capacity (Sheets/Pass)	8 Sheet	8 Sheet
Shred CD, CC	No	No
Speed	3.0m/min	3.0m/min
Auto Start/Stop	Yes	Yes
Manual Reverse Function	Yes	Yes
Overload Protection	Yes	Yes
Basket Volume	23L	23L
Noise	Under 58dB	Under 58dB
Max. Shred Time	10min	10min
Unit Dimension	360 x 260 x 550 (mm)	360 x 260 x 550 (mm)
Unit Weight	7.85 kg	7.85 kg

Cash Management / Coin Sorters

FS-4000

Feature

- Coin Tubes Automatically adjust to the next empty tube
- Heavy duty motor allows up to 312 coins to be sorted per minute
- Allows the operator to insert up to 600 coins at a time in the collection opening
- Increases operator speed & quadruples convenience
- Automatically sorts pennies, nickels, dimes & quarters directly into wrappers
- Digital readout displays amount and dollar value of sorted coins
- Easily open cover to take out jammed or unsortable coins

FS-2D (US / CN)

Feature

- Heavy duty motor allows up to 312 coins to be sorted per minute
- Allows the operator to insert up to 400 coins at a time in the collection opening
- Easily open cover to take out jammed or unsortable coins
- Precise internal sorting design and Anti-Jamming device allows all coins to be counted accurately
- Automatically sorts coins directly into wrappers and allows coin tubes to be lifted out easily for simple operation
- Digital readout displays amount and dollar value of sorted coins

FS-2D-CA

Feature

- Heavy duty motor allows up to 312 coins to be sorted per minute
- Allows the operator to insert up to 400 coins at a time in the collection opening
- Easily open cover to take out jammed or unsortable coins
- Precise internal sorting design and Anti-Jamming device allows all coins to be counted accurately
- Automatically sorts coins directly into wrappers and allows coin tubes to be lifted out easily for simple operation
- Digital readout displays amount and dollar value of sorted coins

Specifications

Description	FS-4000	FS-2D	FS-2D-CA
Currency	USD	USD / RMB	CAD
Sorting Speed	312 ea/min	312 ea/min	312 ea/min
Hopper Size	About 600 coins	About 400 coins	About 400 coins
Motor RPM	26	26	26
Tubes Coin	4 each	2 each	2 each
Unit Weight	7.5 lbs / 3.4 kg	4.54 lbs / 2.06Kg	7.28 lbs / 3.31Kg
Unit Dimensions (W x D x H)	7.2 x 11.8 x 10.2 (in) 184 x 300 x 258(mm)	7.1 x 11.5 x 10(in) 180 x 292 x 254(mm)	9.7 x 10.5 x 11.7(in) 245 x 265 x 296(mm)
Power Consumption	6.7w	8w	9.6w

Cash Management / Coin Sorters

CO-1000

Features

- Heavy duty motor allows up to 240 coins to be sorted per minute
- Allows the operator to insert up to 300 coins at a time in the collection opening
- Precise internal sorting design and Anti-Jamming devices allows all coins to be counted accurately
- Automatically sorts coins directly into wrappers and allows coin tubes to be lifted out easily for simple operation

FS-1 (EU/CA/AU)

Features

- Heavy duty motor allows up to 264/312/180 coins to be sorted per minute
- Allows the operator to insert up to 200/360/180 coins at a time in the collection opening
- Precise internal sorting design and Anti-Jamming devices allows all coins to be counted accurately
- Automatically sorts coins directly into wrappers and allows coin tubes to be lifted out easily for simple operation
- Overflow tray collects coins for redeposit as necessary

MS-1

Features

- Allows the operator to insert up to 400 coins at a time in the collection opening
- Precise internal sorting design allow all coins to be counted accurately
- No batteries necessary just manually crank the handle and watch the coins sort directly into wrappers

Specifications

Description	CO-1000	FS-1EU	FS-1CA	FS-1AU	MS-1
Currency	USD	EURO	CAD	AUD	USD
Sorting Speed	240 ea/min	264 ea/min	312 ea/min	180 ea/min	300 ea/min
Hopper Size	About 300 coins	About 200 coins	About 360 coins	About 180 coins	About 400 coins
Motor RPM	20	22	26	22	Manual
Tubes Coin	1 each	1 each	1 each	1 each	1 each
Unit Weight	3.8 lbs / 1.7 kg	5.7 lbs / 2.6 kg	5.6 lbs / 2.6 kg	5.6 lbs / 2.6 kg	2.79 lbs / 1.27 kg
Unit Dimensions	6.8 x 10.7 x 8.5(in)	7.7 x 12.6 x 10.4(in)	7.7 x 12.6 x 10.6(in)	7.7 x 12.6 x 10.6(in)	10.3 x 9.1 x 9.5(in)
(W x D x H)	172 x 271 x 215(mm)	195 x 320 x 264(mm)	195 x 320 x 270(mm)	195 x 320 x 270(mm)	261 x 232 x 240(mm)
Power Consumption	6.5w	6.7w	5.5w	6.7w	N/A

Cash Management / Bill Counters

RBC-3100

Features

- Electric Bill Counter
- Counts over 1200 bills per minute
- Front loading collection opening holds up to 300 bills
- Detects fake bills through Ultraviolet (UV), Magnetic (MG), & Infrared (IR) counterfeit detection
- Automatically begins counting when bills are inserted and stops when counting is finished
- Able to count in batches from 1-999

RBC-2100

Features

- Electric Bill Counter
- Counts over 1000 bills per minute
- Back loading collection opening holds up to 200 bills
- Detects fake bills through Ultraviolet (UV), Magnetic (MG), & Infrared (IR) counterfeit detection
- Automatically begins counting when bills are inserted and stops when counting is finished
- Able to count in batches from 1-999

RBC-1100

Features

- Electric Bill Counter
- Counts over 1000 bills per minute
- Back loading collection opening holds up to 130 bills
- Detects fake bills through Ultraviolet (UV) counterfeit detection
- Automatically begins counting when bills are inserted and stops when counting is finished
- Able to count in batches from 1-999

RBC-1003BK

Features

- Electric Bill Counter
- Counts over 1200 bills per minute
- Front loading collection opening holds up to 300 bills
- Detects fake bills through Ultraviolet (UV), Magnetic (MG), & Infrared (IR) counterfeit detection
- Automatically begins counting when bills are inserted and stops when counting is finished
- Able to count in batches from 1-999

Specifications

Description	RBC-3100	RBC-2100	RBC-1100	RBC-1003BK
Currency	US / EU / CA	US / EU / GB	US / EU / GB	US / EU / CA / AU
Counting Speed	1200 pieces/min	1000 pieces/min	1000 pieces/min	1200 pieces/min
Banknotes Size	4.3 x 2″ / 110 x 50mm 7.3 x 3.5″ / 185 x 90mm	4.3 x 2.0″ / 110 x 50mm 6.1 x 3.5 ″ / 155 x 89mm	3.9" x 1.9" / 99 x 48mm 6" x 3" / 152 x 76mm	4.5 x 1.9″ / 114 x 48mm 6.9 x 3.3 ″ / 175 x 83mm
Hopper Capacity	over 300 bills	over 200 bills	over 130 bills	over 300 bills
Unit Weight	10.1 lbs / 4.6 kg	16.5 lbs / 7.5 kg	12.1 lbs / 5.5 kg	14.9 lbs / 6.7 kg
Unit Dimensions (W x D x H)	10.6 x 9.8 x 8.7 (in) 270 x 250 x 220 (mm)	13.7 x 9.4 x 8(in) 348 x 238 x 205(mm)	9 x 11 x 6 (in) 228 x 279 x 152 (mm)	9.8 x 10.6 x 9.7 (in) 248 x 270 x 245 (mm)
Power Consumption	50w	80w	60w	60w

Cash Management / Bill Counters

RBC-600

Features

- Electric Bill Counter
- Counts over 1000 bills per minute
- Back loading collection opening holds up to 130 bills
- Automatically begins counting when bills are inserted and stops when counting is finished
- Able to count in batches from 1-999

RBC-100P

Features

- Portable Bill Counter
- Battery or AC/DC operation
- Lightweight
- Counts up to 600 bills per minute
- Collection opening holds up to 150 new bills
- Able to count batches from 1 to 100
- Carrying case included

Specifications

Description	RBC-600	RBC-100P
Currency	US / EU / GB	US / EU / GB
Counting Speed	1000 pieces/min	600 pieces/min
Banknotes Size	3.9" x 1.9" / 99 x 48mm 6" x 3" / 152 x 76mm	3.9" x 1.9" / 99 x 48mm 6" x 3" / 152 x 76mm
Hopper Capacity	over 130 bills	120 old bills, 150 new bills
Unit Weight	12.1 lbs / 5.5 kg	0.7 lbs / 0.32 kg
Unit Dimensions (W x D x H)	9 x 11 x 6 (in) 228 x 279 x 152 (mm)	7.6 x 1.9 x 3.5(in) 192 x 50 x 90(mm)
Power Consumption	70w	3w

Cash Management / Counterfeit Detectors

RCD-4000

Feature

- Uses IR camera to automatically detect counterfeit bills

RCD-2000

Features

- Portable Bill Counter
- Battery or AC/DC operation
- Lightweight
- Counts up to 600 bills per minute
- Collection opening holds up to 150 new bills
- Able to count batches from 1 to 100
- Carrying case included

RCD-1000

Features

- Ultraviolet detection (UV) easily detects fake bills and ID cards
- Compact and portable

Specifications

Description	RCD-4000	RCD-2000	RCD-1000
Unit Dimensions (W x D x H)	5.5 x 4 x 8.5 (in) 139 x 101 x 215 (mm)	275 x 150 x 145(mm) 10.8 x 5.9 x 5.7(in)	270 x 120 x 120(mm) 10.6 x 4.7 x 4.7(in)
Unit Weight	1.8 kg / 4lbs	1.0kg / 2.2lbs	0.47kg / 1lbs

Binding Machines

RBE-2000

Features

- Electric punching of up to 20 sheets of 20lb paper at the touch of a button
- Foot pedal for punching included
- Binding capacity of 300 sheets up 20lb paper
- Can use up to 1 1/2" / 38mm plastic binding combs

RBM-1500

Features

- Manual punching of up to 15 sheets of 20lb paper
- Binding capacity of up to 300 sheets of 20lb paper
- Can use up to 1 1/2" / 38mm plastic binding combs
- Document support cover to hold paper straight when punching

RBM-1200

Features

- Manual punching of up to 12 sheets of 20lb paper
- Binding capacity of up to 150 sheets of 20lb paper
- Can use up to 1" / 25mm plastic combs

Specifications

Item / Model	RBE-2000	RBM-1500	RBM-1200
Punching Type	Electric	Manual	Manual
Binding form	Plastic Comb	Plastic Comb	Plastic Comb
Punching Capacity	20sheets (20lbs / 80g)	15sheets (20lbs / 80g)	12 sheets (20lbs / 80g)
Max. Binding Thickness	1 1/2″ / 38mm 2″ / 51mm ellipse comb	1 1/2″ / 38mm 2″ / 51mm ellipse comb	1″ / 25mm ring comb 2″ / 51mm ellipse comb
Max. Binding Width	Up to 11.8″ / 300mm	Up to 11.8″ / 300mm	Up to 11.8″ / 300mm
Hole Distance	9/16″ / 14.3 mm	9/16″ / 14.3 mm	9/16″ / 14.3 mm
Adjustable Margin	1/10~1/4″ / 2~6 mm	1/8~1/4″ / 3~6 mm	1/8~1/4″ / 3~6 mm
Hole Shape	1/8 x 5/16″ / 3 x 8mm	1/8 x 5/16″ / 3 x 8mm	1/8 x 5/16″ / 3 x 8mm
Max number of punching hole	21holes	19 / 21 holes	21holes
Quantity of Movable Cutter	All 21 cutters are movable	None (19 holes for US, 21holes for Others)	3 (19, 20, 21st hole)
Size of Machine	500 x 390 x 260(mm) / 16.7 x 15.4 x 10.2(in)	430 x 395 x 135(mm) / 16.9 x 15.6 x 5.3(in)	420 x 330 x 200(mm) / 16.5 x 13.0 x 7.9(in)
Net Weight	35lbs / 16kg	8.5kg / 19lbs	11.5lbs / 5.2kg

Binding Supplies

Binding Combs

Features

- Various colors and sizes
- Binding up to 425 sheets
- Flexibility by adding or removing sheets

Binding Covers

Features

- Various colors and materials
- Protect valuable plans and documents

Specifications

- PVC Cover
  Clear, clear red, clear blue, clear green, clear smoke
- Poly Cover
- Paper Cover
  Linen: White, black, blue, red
  Leather: White, black, blue, red, grey, ivory
  Twill: Green, navy, graphite
  Emboss with window: White, black
- Gloss cover
  White, black, blue, red
- Thermal Cover

Comb diameter	Sheet capacity	Comb diameter	Sheet capacity
1/4″ / 6mm	25	3/4″ / 19mm	150
5/16″ / 8mm	40	1″ / 25mm	200
3/8″ / 10mm	55	1-1/4″ / 32mm	265
1/2″ / 12mm	90	1-1/2″ / 38mm	330
5/8″ / 16mm	125	2″ / 51mm	425

Royal Sovereign Global Network

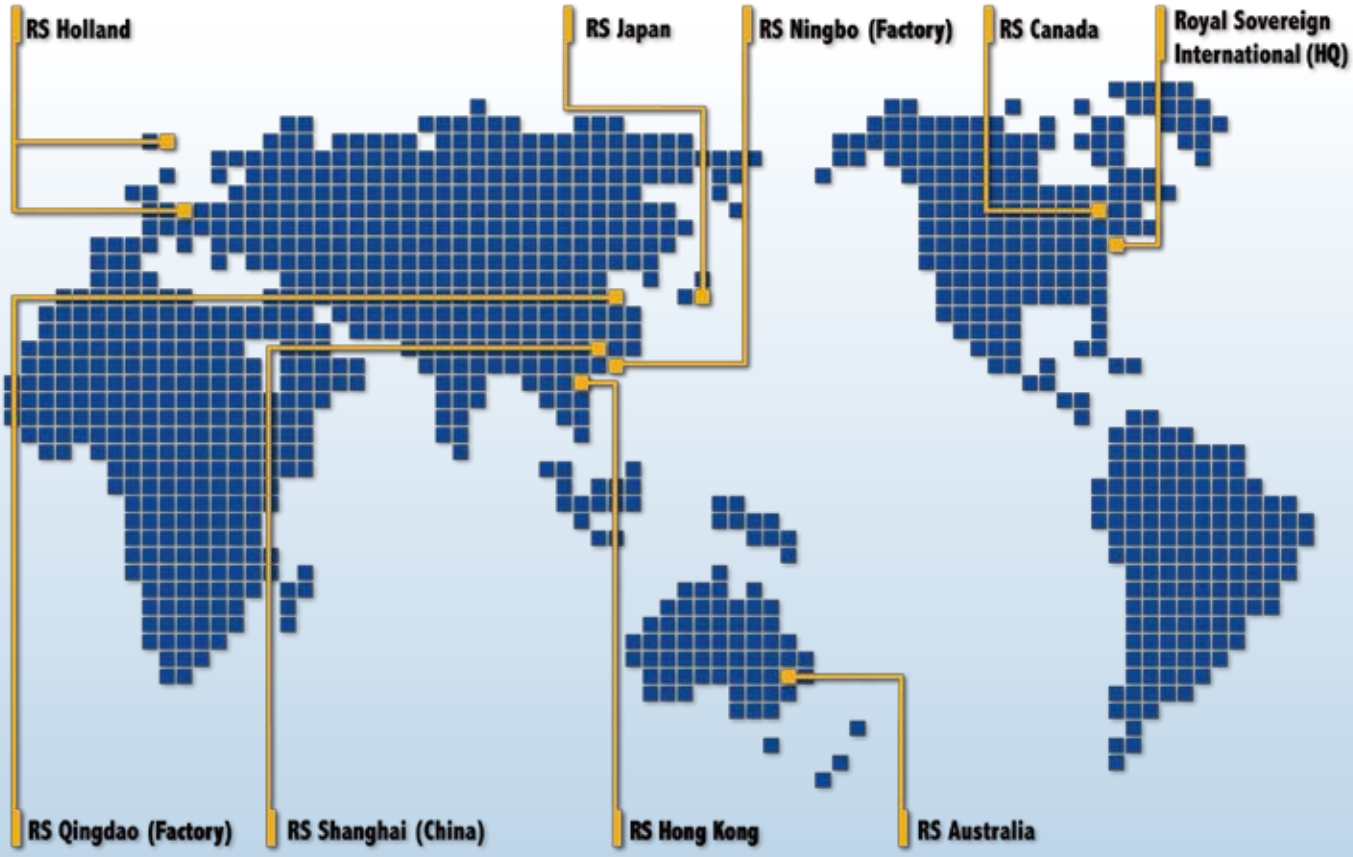

[HEADQUARTERS]

Royal Sovereign International Inc.	Tel: +1) 800-397-1025	info@royalsovereign.com

[INTERNATIONAL SALES OFFICE]

RS Hong Kong	Tel: +86) 532-8965-7860	sales@royalsovereign.com

[GLOBAL NETWORK]

RS Australia	Tel: +61) 2-9674-2127	salesaust@royalsovereign.com
RS Canada	Tel: +1) 905-461-1095	info-ca@royalsovereign.com
RS Holland	Tel: +31) 345.473097	rseu@royalsovereign.com
RS Japan	Tel: +81) 3-5807-1371	rsjapan@royalsovereign.com

www.royalsovereign.com

2011.07